



DESCRIPTION

APPLICATIONS: The Recordall® Transmitter Register (RTR®) is a simple and economical totalizer/pulse transmitter designed for use with all Recordall Disc, Turbo and Compound Series meters to provide output compatibility with Badger Meter, Inc. approved technology solutions.

RESOLUTION: Digital output from the RTR typically has resolution of 1/10th of the register test circle (resolution may vary in some cases). The electronic resolution table in this brochure lists minimum output resolution for all Recordall meter applications.

MOUNTING: The RTR in its shroud assembly uses a bayonet mount compatible with all Recordall Disc, Turbo and Compound Series meters. A seal screw is provided to allow positioning of the register for the most convenient reading and to secure the register to the meter body in a tamper resistant mode. The RTR can be removed from the meter without disrupting water service.

MAGNETIC DRIVE: Direct drive high-strength magnetic coupling through the meter body to the wetted magnet provides reliable and dependable register coupling.

SEALED REGISTER: The RTR local register consists of a six-digit straight-reading mechanical odometer totalizer (located in the six o'clock position), a 360° test circle with sweep hand, and a flow finder to detect leaks. The register gearing is self-lubricating thermoplastic to minimize friction and provide long, reliable life. Permanent sealing eliminates moisture, dirt, and other contaminants. The leak rate of the seal is less than 10-6 cc/sec as tested by a helium mass spectrometer.

TAMPER-PROOF FEATURES: Customer removal of the RTR can be prevented by using a tamper resistant seal screw. Seal screws are provided as standard accessories with the RTR.

CONSTRUCTION: The housing of the RTR is constructed of a strengthened glass lens top and a corrosion-resistant metal bottom. Internal construction materials are thermoplastics for long-life and high reliability. The integrity of the adhesive seal joining the glass top to the metal base provide unmatched protection in water meter applications. A corrosion and tamper resistant seal screw is provided to secure the RTR to the meter. The shroud assembly is thermoplastic.

TEMPERATURE: The operating range of the RTR is -40...49° C (-40...120° F). The water meter should not be subjected to temperatures below freezing.

MOISTURE: The RTR achieves true water resistance due to the adhesive technology used in the sealing process. Leak rates less than 10-6 cc/sec, as tested by a helium mass spectrometer, are comparable to a true hermetic seal. Due to this unique sealing process, the RTR exceeds all applicable requirements of AWWA Standard C707 regarding moisture intrusion. Register fogging and condensation are not an issue.



SPECIFICATIONS

| | |
|--------------------------------|--|
| Transmitter/Register | Straight reading, permanently sealed, magnetic drive |
| Unit of Measure | U.S. gallons, cubic feet, cubic meters, clearly identified on register face |
| Number Wheels | Six with 3/16 in. high numerals font type |
| Test Circle | 360° circle with ten major increments with ten divisions each |
| Weight | 9 ounces |
| Humidity | 0...100% condensing |
| Temperature | -40...49° C (-40...120° F) |
| Signal Characteristics | Open Drain (FET) |
| Visual Resolution | 1/100th of Test Circle |
| Electronic Resolution | 1/10th of Test Circle |
| Typical Signal Duration | 15...75 ms @ 25° C (77° F) 8...75 ms over operating temperature range at 67 µA |
| On State Resistance | 7.5 Ohms @ 25° C (77° F) |
| Power Source | External |
| Maximum Switching | 30V DC @ 1 mA @ 25° C (77° F) |



WIRE CONNECTIONS: The RTR is provided as either a factory prewired assembly or as a register with pre-sized wire harness available for connection in the field.

ELECTRONICS: The piezoelectric switch circuit board is completely sealed against moisture inside the unit and sealed to ensure protection from humidity.

ELECTRICAL: The electronic circuitry is designed to provide immunity to electrical surges and transients per IEC801-2, IEC801-4 Severity Level 4.

OPERATING CHARACTERISTICS: The RTR has an output equal to 1/10th of the meter test circle with the characteristics of an open drain FET. The on-state condition is a solid-state switch closure. Off-state condition is an open circuit. Powered by an external source, the RTR has a maximum rating of 30V DC at 1 mA (25° C).



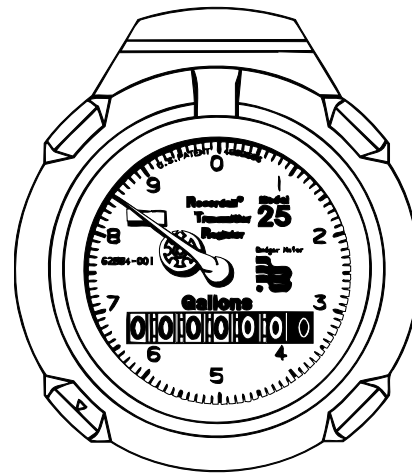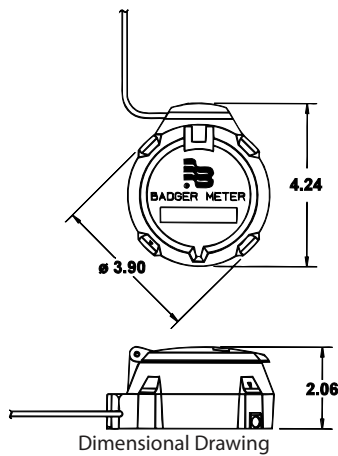

RTR Register

MEASUREMENT RESOLUTION: The minimum electronic resolution of the RTR is as noted below. To verify the correct resolution for your application, contact your Badger Meter regional sales office.

| RECORDALL Disc Series | Size (in.) | Resolution Gallons | Resolution Cubic Feet (ft ³) | Resolution Cubic Meters (m ³) |
|-----------------------|------------|--------------------|--|---|
| M25 | 5/8 | 1 | 0.1 | 0.01 |
| M25 | 3/4 | 1 | 0.1 | 0.01 |
| M35 | 3/4 | 1 | 0.1 | 0.01 |
| M40 | 1 | 1 | 0.1 | 0.01 |
| M55 | 1 | 1 | 0.1 | 0.01 |
| M70 | 1 | 1 | 0.1 | 0.01 |
| M120 | 1-1/2 | 10 | 1 | 0.1 |
| M170 | 2 | 10 | 1 | 0.1 |

| RECORDALL Compound Series (in.) | Resolution Gallons | Resolution Cubic Feet (ft ³) | Resolution Cubic Meters (m ³) |
|---------------------------------|--------------------|--|---|
| 2 | 100 | 10 | 0.1 |
| 3 | 100 | 10 | 0.1 |
| 4 | 100 | 10 | 0.1 |
| 6 | 100 | 10 | 1 |

| RECORDALL Turbo Series (in.) | Resolution Gallons | Resolution Cubic Feet (ft ³) | Resolution Cubic Meters (m ³) |
|------------------------------|--------------------|--|---|
| 1-1/2 | 100 | 10 | 0.1 |
| 2 | 100 | 10 | 0.1 |
| 3 | 100 | 10 | 0.1 |
| 4 | 100 | 10 | 0.1 |
| 6 | 100 | 10 | 1 |
| 8 | 100 | 10 | 1 |
| 10 | 100 | 10 | 1 |
| 12 | 1000 | 100 | 1 |
| 16 | 1000 | 100 | 10 |
| 20 | 1000 | 1000 | 10 |

Polarity **MUST** be observed when connecting the RTR to the remote module. Badger Meter wiring standards use the black conductor as the negative (-) conductor, and the red as the positive (+) conductor.



IMPORTANT

The RTR should only be connected to a Badger Meter, Inc. approved product. Connection to an unapproved product will void the RTR warranty.

RTR registers do **not** transmit a dry contact pulse. Please see the **HR-LCD Pulse Scaled Register** or the **HR-LCD 4-20 Scaled/Unscaled Register** product data sheet, available at www.badgermeter.com.

Control. Manage. Optimize.

Recordall and RTR are registered trademarks of Badger Meter, Inc. Other trademarks appearing in this document are the property of their respective entities. Due to continuous research, product improvements and enhancements, Badger Meter reserves the right to change product or system specifications without notice, except to the extent an outstanding contractual obligation exists. © 2021 Badger Meter, Inc. All rights reserved.